FRIGIDAIRE GALLERY

FGSS2635T D/F/P/E





AVAILABLE COLORS









SIGNATURE FEATURES



Smudge-Proof™ Black Stainless Steel

Practical has never looked so stylish with Smudge-Proof™ Black Stainless Steel, a beautiful new finish with an easy-to-clean fingerprint-resistant surface.



Store-More™ Freezer Capacity

Improved design gives you more usable freezer capacity than ever before.



Chill Drawer

Cold air from the freezer is used to quickly cool food and drinks. Includes temperature control settings.



Adjustable Interior Storage

Over 100 ways to organize and customize your refrigerator. Details vary by model.

SIDE-BY-SIDE REFRIGERATOR

25.5 CU. FT. STANDARD-DEPTH

PRODUCT DIMENSIONS

Height

(Including Hinges & Rollers) 69-7/8"

Width (Doors) 36"

Depth (Including Door) 33-3/8"

MORE EASY-TO-USE FEATURES

PureSource Ultra® II Ice & Water Filtration

Discover how our genuine filtration works to keep your water cleaner. PureSource Ultra* II Water Filters remove 99.3% of lead and 99.9% of cysts from your household water.

PureAir Ultra® Filters

Keeps the air cleaner and fresher.

Store-More™ Humidity-Controlled Crisper Drawers

Keep your fruits and vegetables fresh in our humidity-controlled crisper drawers.

Store-More™ Gallon Door Bins

Door storage gives you room for larger items — like a gallon of milk.

Store-More™ Glass Shelves with Metallic Trim

More space to store your food with edge-to-edge shelves.

Multi-Level LED Lighting

Corner-to-corner LED lighting throughout the refrigerator for better visibility.

CERTIFICATIONS

A.D.A.-Compliant

When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.

Star-K® Certified (Sabbath Mode)



FEATURES

Door Design	Tall Curved		
Door Handle Design	Black Stainless (D), Stainless Steel (F), C-Coordinated (P/E)		
Cabinet Finish	Black (D), Grey (F), C-Coordinated (P/E)		
Door Stops/Door Closers	Yes/Yes		
Door Hinge Covers	Hidden		
Rollers - Front/Rear	Adjustable/Yes		
Energy Saver Plus Technology			
Water Filter Location	Top Right Rear		
Sound Package			
DISPENSER			

Controls	Express-Select®
Dispenser Design	Flush, Single-Paddle
Number of Dispenser Buttons	11
Crushed Ice/Cube Ice/Water	Yes/Yes/Yes
Ice Option/Freeze Option	
Display On/Off Option	Yes
Control Lock/Light	Yes/Yes
Temp/Door Ajar/Power Failure Alerts	Yes/No/Yes
Water Filter Change Indicator Light	Yes
Air Filter Change Indicator Light	Yes

REFRIGERATOR FEATURES	
Interior Lighting	Designer LED
Water Filter Type	PureSource Ultra® II
Air Filter Type	PureAir Ultra®
Fixed Shelves	3 Store-More™ Glass
Sliding Shelves	
Chill Drawer	1 Stacked
Wine/Can Rack	
Upper Crisper/Lower Crisper	1 Clear/1 Clear
Humidity Controls	2
Dairy Compartment	1 Clear
Fixed Door Bins	2 Two-Liter Clear
Adjustable Door Bins	2 One-Gallon Clear
Non-Slip Bin Liner/Bottle Retainers	
Condiment Bin	

FREEZER FEATURES

Door Bins/Tilt-Out Wire Door Bins	4 Clear/No	
Fixed Shelves	2 Wire	
Full Extension Baskets		
Full Freezer Baskets	1 Plastic/1 Wire	
Half Freezer Baskets		
Ice Cream Shelf/Pizza Shelf	Yes/Yes	
SpaceSaver™ Shelf		
Lighting	LED	
CERTIFICATIONS		
A.D.A. Compliant ¹	Yes	

Amps @ 120 Volts

Minimum Circuit Required (Amps)

Shipping Weight (Approx.)


Star-K® Certified (Sabbath Mode)	Yes
SPECIFICATIONS	
Total Capacity (Cu. Ft.)	25.5
Refrigerator Capacity (Cu. Ft.)	16.5
Freezer Capacity (Cu. Ft.)	9.0
Power Supply Connection Location	Right Bottom Rear
Water Inlet Connection Location	Left Bottom Rear
Voltage Rating	120V/60Hz
Connected Load (kW Rating) @ 120 Volts²	1.02

^{&#}x27;When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.

"For use on adequately wired 1201/, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

PRODUCT DIMENSIONS

A-Height (Including Hinges & Rollers)	69-7/8"
B-Cabinet Width/Door Width	35-7/8"/36"
C-Depth (Including Door)	33-3/8"
Depth with Door Open 90°	50"

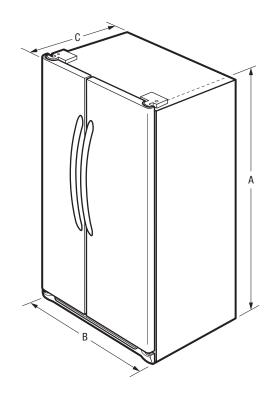




Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca. Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca

8.5

15

293 Lbs.



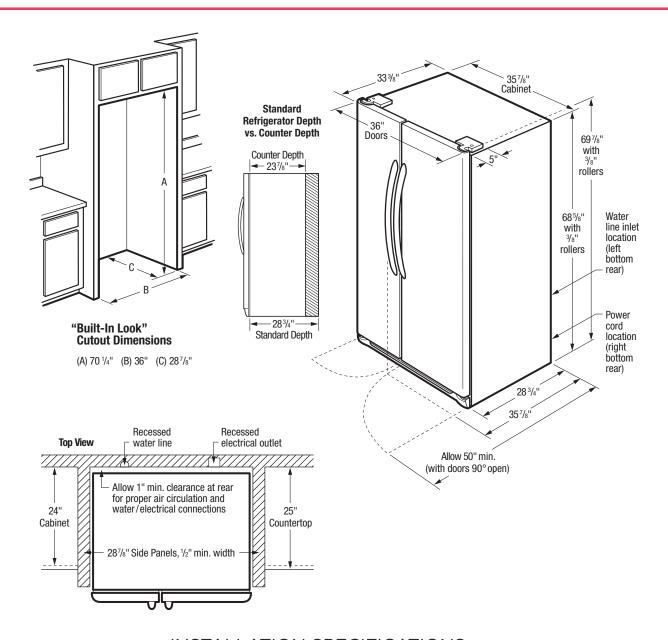

INSTALLATION SPECIFICATIONS

- Product Shipping Weight (approx.) 293 Lbs.
- · Voltage Rating 120V/60 Hz
- Connected Load (kW Rating) @ 120 Volts = 1.02 kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 8.5 Amps
- · Always consult local and national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- · When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120° to 180° door swing, providing complete drawer/crisper access and removal. (Absolute 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide drawer/crisper access with
- To ensure optimum performance, avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.

- For proper ventilation, front grille MUST remain unobstructed.
- · Recess electrical outlet when possible.
- · Water recess on rear wall recommended to prevent water line damage.
- Water Pressure Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.
- Adjustable front rollers to assist with door alignment.

"BUILT-IN LOOK" SPECIFICATIONS

- Minimum opening of 70-1/4" H x 36" W x 28-7/8" D required to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- · Remove all wall/floor molding prior to installation.



Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca. Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca